Epic Series FlatTV

37FD9954

# 37" Widescreen Plasma FlatTV HDTV Monitor

- ***Flat, Slim and Wide design***
- ***Plasma ALiS/HD technology***
- ***Superslim 3.5” depth***
- ***Brightness 1000cd/m²***
- ***160° viewing angle / Anti-reflective coating***
- ***Integrated speakers/sound system***
- ***2x13Watt RMS***
- ***HD in - 2fhYPbPr in / RGB+HV***
- ***DVI-digital in / 1fh YUV in***
- ***VGA in/out - SmartPort***
- ***RC out - to iTV system***
- ***Fanless design*** *(no fan noise)*
- ***Optional stand***

FLATTV™

PHILIPS

# 37" Widescreen Plasma FlatTV HDTV Monitor /US

**37FD9954**

## Product highlights

***ALiS/HD Plasma technology*** *with 852x1024 pixels.*

***Dual HD component input and full 1080i*** *resolution display for connection to high definition input.*

***480i, 576i, 1080i, 480p, 720p*** *resolution support.*

***Powerful 2x13W RMS amplifier*** *built in. Full digital sound processing.*

***Continious Zoom****. Cursor movable zoom window.*

***YPbPr inputs*** *for best DVD reproduction*

***3 menu languages****, English, French and Spanish*

## Technical specifications

### Plasma screen

- Visible screen diameter 37" - 16:9 aspect ratio
- ALiS/HD 852x1024 pixels (x3)
- Contrast ratio : 1000:1 (dark room)
- Brightness : 1000cd/m$^2$ (without filter plate)
- Anti-reflex coated glass screen
- Fanless design (no fan noise)
- Wall mount kit : Flat-to-Wall as well as Tilted

### Picture processing

- Video standards :
  - – PAL 4.43 (B, G, D, H, I, N)
  - – PAL 3.58 (M, N)
  - – NTSC 3.58 (M)
  - – NTSC 4.43
  - – SECAM
- Tint Control (3 modes)

### Ease of Use

- Menu Languages : English, French and Spanish
- Dynamic graphical user interface. Easy and intuitive operation through feedforward and backtracking display.
- Full menu control of all functions through layered menus.
- Onscreen status display for sources and functions (OSD)
- RS232 for service and control via PC
- Last Status (for picture & sound)

### Remote Control

- Second handset RC19335009

### Connections

- VGA
  - VGA in (15pin sub-D) + audio L-R
  - FlexVGA (Loopthrough/in) (15pin sub-D) + audio L-R
- Audio / Video
  - AV 1 : – Video CVBS, audio L-R
  - AV 2 : – Video CVBS, audio L-R
    - – S-Video (Y/C)
  - AV 3 : – Component video in YPbPr, audio L-R (+CVBS)
    - – Component video in YPbPr (2Fh for DVD), audio L-R
    - – R/G/B/H/V (cinch) + audio L-R
  - DVI-d in (digital) + audio L-R
    - – Video CVBS out, audio L-R out
  - RC-out for ICONN box
  - RS232 control / service

### Miscellaneous

- VGA cable included, 2m
- CD-rom with RS232 driver software included
- Ambient temperature : +5/+40°C
- Maximum operating altitude : 2000m / 6562ft
- Mains : AC 95–264V, 50/60Hz
- Power consumption: ±300W (normal operation) ; Stand by : <2W
- Weight : monitor 88.2 lbs
- Dimensions (WxHxD):
  monitor : 42x23x3.5 in.
  carton : 58.6x37.5x19.3 in.
- UPC: 0 37849 94139 3

**Monitor connectors**




**RC19335009**

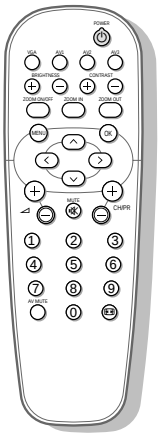

➢ Optional FTR9955 e-Box delivers superior picture with Digital Natural Motion™ and the convenience of one cable hookup

➢ Optional Matchline FTR9965 e-Box delivers all of the benefits of the FTR9955 PLUS the ultimate in picture performance with Pixel Plus™ and 2 Tuner Split Window PIP

➢ Optional TC37FL02 Television Stand (shown on front) provides the ideal solution to table top television placement with an emphasis on high design and safety.

Printed in the U.S.A.
©2003 Philips Consumer Electronics Company
Specifications subject to change without notice.

***www.philips.com or AOL keyword: philips***

PHILIPS